


# MOVING FILTER AIR MONITOR ALPHA, BETA/GAMMA PARTICULATES

Model Series- SAAM  
SAAM-4HVM ~ SAAM-1

## FEATURES:

- ❖ MOVING AIR FILTER
- ❖ AIRBORNE ALPHA LESS RADON AND BETA/GAMMA PARTICULATES
- ❖ RUGGED, 100% DUTY CYCLE
- ❖ SETTABLE ALARM
- ❖ HIGH THROUGH-PUT
- ❖ UNATTENDED OPERATION  
**Up to 6 WEEKS**
- ❖ PRINTED RECORD (Optional)
- ❖ 4 CHANNEL AIR MONITOR –  
SAAM-4HVM  
Alpha – Short/Long Life  
Beta – Short/Long Life
- ❖ 2 CHANNEL AIR MONITOR –  
SAAM-1  
Alpha & Beta-Gamma
- ❖ COUNTS SEPARATELY AND SIMULTANEOUSLY
- ❖ USB and/or ETHERNET OUTPUT

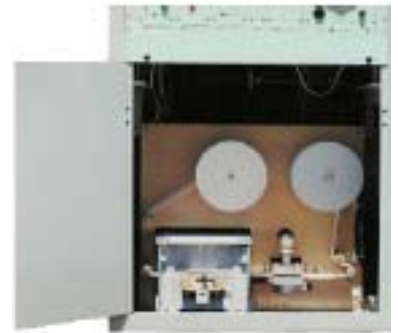

Filter Paper

## APPLICATION:

The SAAM Series Monitors are used for monitoring effluent from radioactivity utilizing or producing facilities either directly at the stack or other outlet or at the property boundary. The SAAM Series are designed to provide a **complete record of activity for up to 45 days of unattended operation**. This instrument automatically advances the filter. This avoids frequent manual filter replacement. Alarms are preset by user.

## OPTIONS:

1. Single Channel Analyzer window(s) specifically for Pu-239, and U-238 and/or other nuclides.
2. Clock and calendar give date and time of each reading.
3. Helium Flush for Alpha Spectroscopy.



**TECHNICAL ASSOCIATES  
OVERHOFF TECHNOLOGY**

7051 Eton Ave., Canoga Park, CA 91303  
818-883-7043 (Phone) 818-883-6103 (Fax)

[tagold@nwc.net](mailto:tagold@nwc.net)

[WWW.TECH-ASSOCIATES.COM](http://WWW.TECH-ASSOCIATES.COM)

Divisions of  US NUCLEAR CORP

# MOVING FILTER AIR MONITOR

## ALPHA, BETA/GAMMA PARTICULATES

### Model Series- SAAM SAAM-4HVM ~ SAAM-1

#### DESCRIPTION:

The **SAAM-4HVM** is a four channel air monitor for simultaneous measuring of gross Alpha, Beta/Gamma; short and long life particulates. The **SAAM-1** is a two channel monitor for measuring gross Alpha & Beta/Gamma.

Like all of the SAAM series, these are continuous duty, high capacity, rugged skid or caster-mounted systems.

**Electronics** are microprocessor with color LCD display. Also preamps etc. are plug-in modules allowing change or addition of function as needed and allowing rapid repair by substitution of modules in the field.

**Shields** are void free lead encased in welded steel and with stainless steel liners for a long, useful life and easy decontamination.

**Filters** are easily changed via quick disconnect, O-ring sealed filter holder. Shield can be opened for filter change or cleaning with minimum effort. All shield connections and openings are sealed against air leaks.

The **air moving system** is based on a high capacity air pump capable of delivering 4 cfm with **options** up to 30 cfm free air and a real time electronic flow meter. The flow meter feeds directly into the TAquire software data analysis for more accurate calculation of airborne concentration and total activity.

The entire system is mounted in a self-contained rugged cabinet and comes complete with all cabling and connectors in place ready to operate. The standard unit is operated from 120 V single phase, 60 Hz; 220 V optional, 50 or 60 Hz.

The modular system is covered by T/A's unique exchange warranty, in addition to the full one year warranty covering all T/A products.

#### SPECIFICATIONS:

MODEL	SAAM-1	SAAM-1	SAAM-4HVM	SAAM-4HVM
Channels:	1	2	1 & 2	3 & 4
Physical Form:	Particulates	Particulates	Particulates	Particulates
Activity Detected:	Alpha	Beta/Gamma	Alpha – Short & Long Life	Beta/Gamma – Short & Long Life
Detector Type:	Scintillator (Optional Solid State)	Thin Window GM	Solid State	Thin Window GM
Size:	2" Diameter	2" Diameter	1" Diameter	2" Diameter
Model:	ZnS (Ag) Optional Solid State)	T-1190	SS-A1	T-1190
Filters Media:	Moving Filter	Moving Filter	Moving Filter	Moving Filter
Size:	75mm x 100 meters	75mm x 100 meters	75mm x 100 meters	75mm x 100 meters
Construction:	Standard or Glass Fiber	Standard or Glass Fiber	Standard or Glass Fiber	Standard or Glass Fiber
Standard Shielding:	None	3" (Pb) Lead	½" Steel	1" (Pb) Lead
Optional Shielding:	None	1" (Pb)	None	3" (Pb) Lead
Sensitivity:	2 x 10 <sup>-13</sup> µCi/ml	2 x 10 <sup>-13</sup> µCi/ml	2 x 10 <sup>-13</sup> µCi/ml	2 x 10 <sup>-13</sup> µCi/ml



**TECHNICAL ASSOCIATES  
OVERHOFF TECHNOLOGY**

7051 Eton Ave., Canoga Park, CA 91303  
818-883-7043 (Phone) 818-883-6103 (Fax)

[tagold@nwc.net](mailto:tagold@nwc.net)

[WWW.TECH-ASSOCIATES.COM](http://WWW.TECH-ASSOCIATES.COM)

Divisions of  US NUCLEAR CORP

# MOVING FILTER AIR MONITOR

## ALPHA, BETA/GAMMA PARTICULATES

Model Series- SAAM  
SAAM-4HVM ~ SAAM-1

### SPECIFICATIONS (continued):

#### ELECTRONIC SYSTEM DESCRIPTION:

Micro-processor includes:

CPU with data acquisition	Keyboard
High resolution, color	Color LCD Monitor
Mouse	Audio
Manuals	Onscreen Graphics (Built-in Printer Optional)

<b>Data Storage:</b>	Non-volatile memory 1 year. Data stored every 2 minutes all year.
<b>1 terabyte hard drive:</b>	Stores programs, plus room to add additional new software functions in the future.
<b>Energy Analyzer:</b>	Fully adjustable single channel analyzer with independent High Voltage power supply.
<b>Power Supply:</b>	1 ea. MVR-5R
<b>High Voltage Supply:</b>	Separately variable for each detector from 0 to 1500V. Standard FM-5 modular series.
<b>Display Monitor:</b>	Showing both real time concentration and accumulated dose for each channels.
<b>Accuracy:</b>	±10% except for resolution loss and statistical variation.

#### SPECIALIZED AIR MONITOR SOFTWARE.

- ❖ User settable Engineering Units.
- ❖ Calibration feature allows readout directly in Ci/cc or cps/m or other units.
- ❖ Integrates results over an eight hour, or 24 hour interval.

<b>MENU OPTIONS:</b>	1. Modify shift length	2. Change filter
	3. Configure energies	4. Set alarms
	5. Start shift	6. Calibration

**ALARMS:** Alarms pre-settable to any trigger level.

<b>Low Level Alarm:</b>	Automatic Reset
<b>High Level Alarm:</b>	High level alarm remains activated until RESET is pushed.
<b>Alarm Indication:</b>	Red-High Level, Amber-Low Level
<b>Audio:</b>	1000 Hz, greater than 80 db. Also see <b>Safety Features</b> below.

#### AIR MOVING SYSTEM:

<b>Air pump:</b>	Extremely rugged continuous high capacity Positive displacement pumping system. Ultra Low Noise Pump
<b>Pump Drive Motor:</b>	1 HP, 50/60 Hz, capacitor start, induction run.
<b>Flow Rate:</b>	Electronic mass flow meter continuously informs analysis system.
<b>Inlet and Outlet:</b>	20 foot 3/4" hose inlet: 20 foot 1" hose outlet. Length may be extended.



**TECHNICAL ASSOCIATES**  
**OVERHOFF TECHNOLOGY**

7051 Eton Ave., Canoga Park, CA 91303  
818-883-7043 (Phone) 818-883-6103 (Fax)

[tagold@nwc.net](mailto:tagold@nwc.net)

[WWW.TECH-ASSOCIATES.COM](http://WWW.TECH-ASSOCIATES.COM)

Divisions of  US NUCLEAR CORP

# MOVING FILTER AIR MONITOR

## ALPHA, BETA/GAMMA PARTICULATES

Model Series- SAAM  
SAAM-4HVM ~ SAAM-1

### CONTROLS:

**System:** ON-OFF  
**Air:** ON-OFF  
**Alarms:** (each channel) **High Level Alarm:** Set  
(each channel) **High Level Alarm:** Reset  
(each channel) **Low Level Alarm:** Set  
(each detector) **Voltage:** Set  
(each detector) **Energy Threshold/Window:** Set

### STANDARD SPECIFICATIONS:

**High Voltage Supply:** Separately variable from 0 to 1,5000 VDC at 200  $\mu$ a on scintillation or proportional channels.  
**LCD Color Monitor:** 17" Monitor shows both real time concentration & accumulated dose for all Channels  
**Accuracy:** +/- 10% except for resolution loss and statistical variation  
**Alarms:** Alarms are pre-settable to any trigger level  
**Low Level Alarm:** Automatic Reset  
**High Level Alarm:** High level alarm remains activated until RESET button is pushed  
**Alarm Indication Lights:** 6 Lights Red-high level; Amber-low level count for each channel, plus more indicators shown on LCD Monitor.  
**Audio:** 1,000 Hz, greater than 80 db  
**Outputs:** **Alarm Condition Outputs:**  
1. Logic Level Signal  
2. Contact Closure or Opening  
Ethernet  
USB  
**Standard Installation:** Cabinet: heavy gauge steel. Skid or caster mounted  
Five inch ball bearing casters (4 each). Two of these are full 360 degree swiveling.  
**Special Safety:** Loss of system vacuum air flow alarm with relay switch closure.  
Loss of signal alarm. All system circuits fused.  
**Power:** 120 VAC – 220 VAC; optional 50/60 Hz  
**OPTIONAL:** Thermal protection on motor.



**TECHNICAL ASSOCIATES**  
**OVERHOFF TECHNOLOGY**

7051 Eton Ave., Canoga Park, CA 91303  
818-883-7043 (Phone) 818-883-6103 (Fax)

[tagold@nwc.net](mailto:tagold@nwc.net)

[WWW.TECH-ASSOCIATES.COM](http://WWW.TECH-ASSOCIATES.COM)

Divisions of  US NUCLEAR CORP

# MOVING FILTER AIR MONITOR ALPHA, BETA/GAMMA PARTICULATES

Model Series- SAAM  
SAAM-4HVM ~ SAAM-1

## OPTIONS:

- ❖ Up to 3 Channels of 4-20mA Chart Recorder Drive or Communicate with the computer
- ❖ Skid Mount
- ❖ Grab Sample Port
- ❖ Available without air mover or with alternate air movers.
- ❖ Broader range 12 decades.
- ❖ Different detector types.
- ❖ Positive displacement of Roots Blower.
- ❖ Push-button Detect & Test sources (License exempt quantities)
- ❖ Flow rate can be increased to 30 cfm with larger pump and minor changes in the plumbing
- ❖ Lighter system with less Shielding eg: 1" thick.

## WEIGHT, DEMENSION, SHIPPING:

### SAAM-4HVM

**Dimensions:** 29" wide x 31" deep x 41" high - exclusive of casters.  
**Weight:** 1600 lbs.  
**Shipping Weight:** 1750 lbs.

### SAAM-1

**Dimensions:** 24" wide x 36" deep x 41" high - exclusive of casters.  
**Weight:** 620 lbs.  
**Shipping Weight:** 750 lbs.



**TECHNICAL ASSOCIATES  
OVERHOFF TECHNOLOGY**

7051 Eton Ave., Canoga Park, CA 91303  
818-883-7043 (Phone) 818-883-6103 (Fax)

[tagold@nwc.net](mailto:tagold@nwc.net)

[WWW.TECH-ASSOCIATES.COM](http://WWW.TECH-ASSOCIATES.COM)

Divisions of  US NUCLEAR CORP