

GM & PROPORTIONAL PROBES FOR USE WITH PORTABLE INSTRUMENTS

Models - P-13; P-13A; P-15; P-15A; P-23; P-24; P-28; P-28/4; P-1212
P6-LB; P6-A; PN-13; PPG-31; PPG-31T; PPG-41; PPG-41T

DESCRIPTIONS:

GM & PROPORTIONAL PROBES:

P-13: Side-viewing, energy compensated GM Probe with a 30 mg/cm wall. Energy response is 0.40 KeV to 1.25 MeV 20%. Housed in high impact plastic, which is splashproof and rugged. **Dimensions:** 1-3/8" dia. x 6" long.

P-13A: Identical to the P-13 with Beta window and sliding Beta shield.

P-15: Alpha, Beta, Gamma Probe (GM) for rapid checking of laboratory bench and equipment surfaces and for checkout of personnel, the P-15 uses a 1-3/4" mica window diameter, 1.5 mg/cm pancake tube. Background is normally 50 to 60 counts per minute. Extremely sensitive to Alphas with sufficient energy to penetrate window and Betas > 50 KeV. Window is protected by a 79% open, grill to prevent puncture or other damage while presenting minimum absorption to incoming radiation. **Detects:** 5 KeV X-Rays and above.

P-15A: Same as P-15 with 1/4" lead shielding.

P-23: Same detector as P6-LB with 3 PIN connector on the probe.

P6-LB: Low Background Probe; end window detects alpha, beta and gamma radiation. It offers low background without loss of alpha or beta sensitivity. The 2 cm dia. x 1.5 mg/cm mica window is protected by a removable, cleanable grill. Primary use of P6-LB is for locating surface contamination. **Dimensions:** 30 mm dia. x 110 mm long excluding cord. **Operational Voltage:** 500 Volts. **Detects:** 5 KeV X-Rays and above.



P-13 & P-13A



P-15 & P-15A



P-23 & P6-LB



**TECHNICAL ASSOCIATES
OVERHOFF TECHNOLOGY**

7051 Eton Ave., Canoga Park, CA 91303
818-883-7043 (Phone) 818-883-6103 (Fax)

tagold@nwc.net

WWW.TECH-ASSOCIATES.COM

Divisions of



US NUCLEAR CORP

GM & PROPORTIONAL PROBES FOR USE WITH PORTABLE INSTRUMENTS

Models - P-13; P-13A; P-15; P-15A; P-23; P-24; P-28; P-28/4; P-1212
P6-LB; P6-A; PN-13; PPG-31; PPG-31T; PPG-41; PPG-41T

GM & PROPORTIONAL PROBES:

P-24: **Underwater Probe** uses gamma sensitive GM tube. Constructed of anodized, welded aluminum with O-ring seal compressed by stainless steel bolts. The system has been tested by cycling to 60 feet of water pressure. Lifetime of the detector is approximately 10^{10} counts.



P-24

P-28: **“Long Arm” Probe** consists of 1-3/4” net diameter pancake tube mounted at the end of a 40” wand. For rapid checking of laboratory bench and equipment surfaces, floors and walls. Sensitive to soft betas, from C and to alphas. The 1.5 – 2 mg/cm window is protected by an easy to decontaminate grill. Wand is balanced and weighs only 23 ounces. The angle of the detector can be adjusted and locked in place.



P-28

P-28/4: Same as P-28 but includes 4 pancake tubes in head for faster more complete monitoring.



P-28/4

P-1212: **Alpha, Beta Spot Probe**, highly directional, small window, small volume GM probe designed for locating and measuring sources of alpha and beta radiation. The tube has a 6 mm dia. x 1.5 mg/cm mica window. Low background (typically less than 2 cpm) makes it ideal for measurements of low level sources.
Dimensions: 13mm dia. x 137mm long.



P-1212



**TECHNICAL ASSOCIATES
OVERHOFF TECHNOLOGY**

7051 Eton Ave., Canoga Park, CA 91303
818-883-7043 (Phone) 818-883-6103 (Fax)

tagold@nwc.net

WWW.TECH-ASSOCIATES.COM

Divisions of



US NUCLEAR CORP

GM & PROPORTIONAL PROBES FOR USE WITH PORTABLE INSTRUMENTS

Models - P-13; P-13A; P-15; P-15A; P-23; P-24; P-28; P-28/4; P-1212
P6-LB; P6-A; PN-13; PPG-31; PPG-31T; PPG-41; PPG-41T

GM & PROPORTIONAL PROBES:

P6-LB: **Low Background Probe;** end window detects alpha, beta and gamma radiation. It offers low background without loss of alpha or beta sensitivity. The 2 cm dia. x 1.5 mg/cm mica window is protected by a removable, cleanable grill. Primary use of **P6-LB** is for locating surface contamination.
Dimensions: 30 mm dia. x 110 mm long excluding cord.
Operational Voltage: 500 Volts. **Detects:** 5 KeV X-Rays and above.

P6-A: Similar to **P6-LB** but operates at nominal **900 Volts**.

PN-13: **Energy Compensated Neutron Detector** consisting of a **BF-3** proportional neutron tube within a 10" low density polyethylene sphere. Detects neutrons from thermal to above 15 MeV. Sensitivity is approximately 120 cpm per mRem/hr.
Dimensions: 10" W x 10" D x 12" H including stand and hanger.
Close adherence to the ICRP Neutron Response Curve.

PPG-31: **Flat, Gas Flow Detector.** Excellent sensitivity to Beta and/or Alpha Radiation over an area which measures 6" x 9". Can operate as a Proportional or GM counter. **Weight:** 2 1/2lbs.

Proportional Operation: Counting gas is typically 90% Argon and 10% Methane (P-10 Gas).

Operational Voltage: 1100 Volts. **Output Signal** is about 2V.

GM Operation: Counting gas is usually 99.05% helium and 0.95% isobutane.

Operational Voltage: 1725 Volts. **Output Signal** between 2 and 200V.

Alpha Only Count: the Detector is configured as a thin window proportional counter.

Operational Voltage: 1300 Volts.

Optional: One-way inlet and outlet valves allow detectors to be recharged at intervals for use away from the gas supply.

PPG-31T: **Gas Flow Detector** has **three times the Gamma sensitivity** of the **PPG-31**. The chamber and interior are tungsten plated. Otherwise similar to the **PPG-31**.

PPG-41: Identical to the **PPG-31** except that it's sensitivity area is 6" x 15".
Weight: 3 1/2 lbs.


PPG-41T: **Gas Flow Detector** which has **three times the Gamma sensitivity of the PPG-41**. The chamber and interior are tungsten plated. Otherwise similar to the **PPG-41**.



**P-23 & P6-LB
& P6-A**



PN-13

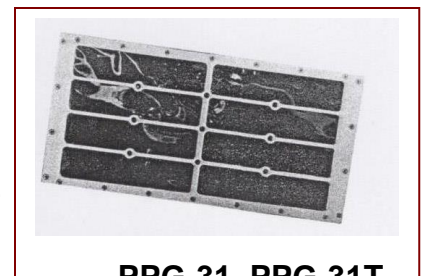

**PPG-31, PPG-31T,
PPG-41, PPG-41T**



**TECHNICAL ASSOCIATES
OVERHOFF TECHNOLOGY**

7051 Eton Ave., Canoga Park, CA 91303
818-883-7043 (Phone) 818-883-6103 (Fax)

tagold@nwc.net

WWW.TECH-ASSOCIATES.COM

Divisions of  US NUCLEAR CORP